



**S** **R** **01** **M** **012**

SANDER MODEL NAME PRODUCT CODE PRODUCT TYPE PANEL THICKNESS



**SR07M012**  
**HANGER**

- It is made of anodized aluminum double hook.
- This ergonomic product is 35 mm in width and 55 mm in height.
- Aluminum was used in the manufacturing of this product.
- It is corrosion-free within the guarantee term.
- Water and humidity resistant.
- Plastic material is added at the product's end to serve as a stopper and prevent impacts.

**PS0112M**  
**U - Connection Profile**

- The edges of the panel are not visible when the cabin system spins to the application of this connection piece.
- The U profile's exterior dimensions will be 22 x 15 mm, with a wall thickness of 1.5 mm.
- It will be used to link U profile-Wall and U profile-Divider Panels.
- Its dimensions are 4.2 x 11 mm. Thick threaded, stainless steel screws are used to fasten it.

**PS0212M**  
**Top Panel Connection Profile**

- Matte anodized metal top Profiles will be installed on the cabinet system's top, front, and side edges.
- A curved profile with dimensions of 50 mm x 45 mm and a wall thickness of 1.2 mm will be utilized as the header profile.

**SR09M012**  
**HINGE**

- This product belongs to the category of closed (panel overlap) style door systems.
- There is graded ABS plastic for closing (panel rebated) door systems that allows the doors to close automatically.
- Metal pieces will be composed of anodized aluminum.
- They're compatible with both 12 mm and 18 mm HPL panels.

**SR04M012**  
**LOCK**

- They're compatible with both 12 mm and 18 mm HPL panels.
- It has a mechanism for sliding.
- Matte metal body and handle.
- Antibacterial plastic floor connection.
- Sliding is used for locking.

**SR01M012**  
**LEG**

- The size range is 150-200 mm, with a diameter of 27 mm.
- They're compatible with both 12 mm and 18 mm HPL panels.
- They're linked to the anti-bacterial plastic floor.
- Body is produced with matte anodized aluminum.
- It has a carrying capacity of 70 kg.
- It has 52 mm diameter leg cover.

**PS0412M**  
**Corner Connection Profile**


- The edges of the panel are not visible when the cabin system spins thanks to the application of this connection piece.
- Size: 30 x 30 mm.
- Compact laminate panels will grab the corner profile on all sides.
- This product attached using 304 grade stainless steel screws with a coarse thread measuring 4.2 x 11 mm.

**SR08M012**  
**GRIP**


- It is 25 mm in diameter, and 32 mm in length.
- It has an M8x35 grub screw connection.
- It is not affected by water, humidity and corrosion.
- It is warranty is covered by SANDER's guarantee.




**TOP VIEW**

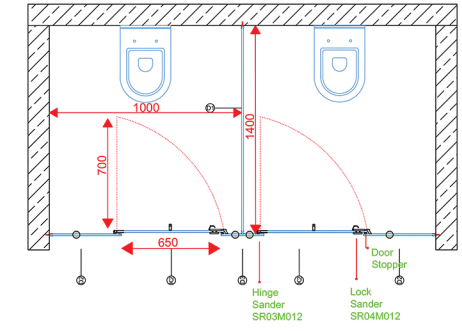

**FRONT VIEW**

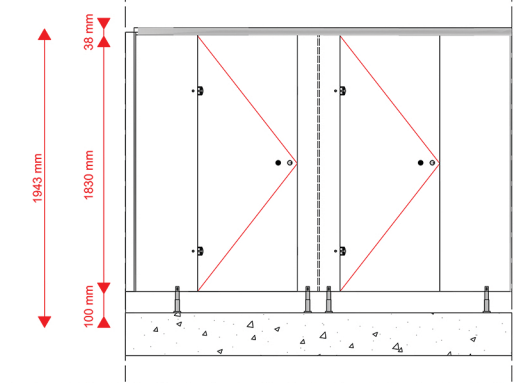

**SIDE VIEW**

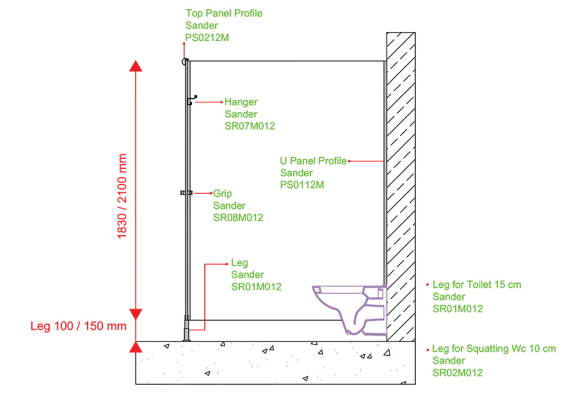

**PANELS**  
The feature is 12 mm Compact laminate panels with double surface decorative, water, scratch, and break resistant, bacteria free, and fire retardant. CGS - CGF EN 438-4 class

**LOCK**  
The door opens with the colored mechanism on the mechanism (SLIDE). It indicates whether or not it is busy from the outside. It's made of MATTE anodized aluminum.

**HINGE**  
Matte Anodized Aluminum for single-face (CLOSING SYSTEM) door systems, with self-closing, degrees adjustable, and security screw.

**LEG**  
Anti-bacterial plastic floor connection, matte anodized metal. The adjustable height is 100-150 mm, making it suited for moist regions in general. It aids in adapting to the current slope.

**CONNECTIONS AND PROFILES**  
At junctions, head profiles and "U" profiles MAT aluminum, panel-wall, and panel-panel are utilized. Fasteners used in cabinet assembly are all stainless steel.